



GO GETTER 2

Portable Sound System



Perfect for...

- Indoor & Outdoor Events
- Parks & Recreation
- Fitness Centers
- Schools
- Group Classes
- Houses of Worship
- Corporate Events
- Auctions
- Rental
- Cemeteries
- Funerals
- Libraries
- Camps
- and more!




TECH SPECS

- 109 dB of clear sound
- 80W AC/DC RMS
- 1.9 GHz wireless microphone frequency
- 300'+ wireless microphone range
- Two universal mic inputs
- 1/4" & 3.5 mm AUX line input
- 1/4" line output
- Built-in rechargeable Lithium Ion batteries
- One high output horn tweeter
- One 6.5" woven fiber woofer
- External speaker output powers optional Go Getter 2 companion speaker

FEATURES

- Reach crowds of 500+
- Connect up to four wireless mics
- Anchor AIR wireless companion speaker compatible
- Built-in Class 1 Bluetooth
- Built-in rechargeable batteries operate 11 - 15 hours on a single charge

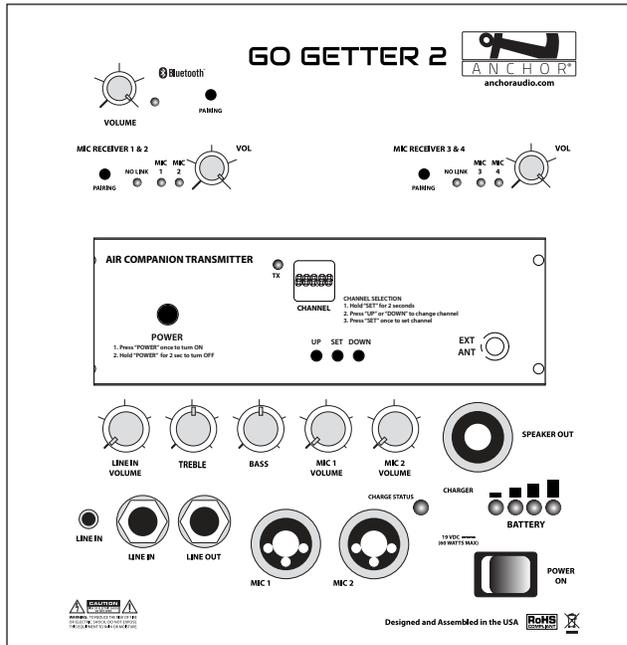

(GG2-XU4 Back Panel)

| Go Getter 2 Models | |
|--------------------|--|
| GG2 | Go Getter 2 with built-in Bluetooth |
| GG2-U2 | Go Getter 2 with built-in Bluetooth & dual wireless mic receiver |
| GG2-U4 | Go Getter 2 with built-in Bluetooth & two dual wireless mic receivers |
| GG2-X | Go Getter 2 with built-in Bluetooth & AIR transmitter |
| GG2-XU2 | Go Getter 2 with built-in Bluetooth, AIR transmitter & dual wireless mic receiver |
| GG2-XU4 | Go Getter 2 with built-in Bluetooth, AIR transmitter & two dual wireless mic receivers |
| GG2-AIR | Go Getter 2 AIR wireless companion speaker |
| GG2-COMP | Go Getter 2 unpowered wired companion speaker |
| Microphones | |
| WH-LINK | Wireless handheld mic (1.9 GHz) |
| WB-LINK | Wireless belt pack transmitter (1.9 GHz) |
| HBM-LINK | Headband mic (3.5 mm plug) |
| CM-LINK | Collar mic (3.5 mm plug) |
| EM-LINK | UltraLite mic (3.5 mm plug) |
| LM-LINK | Lapel mic (3.5 mm plug) |
| MIC-90 | Wired handheld mic with 20 ft. cable (XLR plug) |

| Technical Specifications | |
|---------------------------------|--|
| Rated Power Output | 80 Watts AC/DC RMS |
| Max SPL @ Rated Power | 109 dB @ 1 meter |
| Frequency Response | 50 Hz – 16 kHz ± 3 dB |
| Microphone Wireless Frequency | 1.9 GHz DECT |
| Microphone Wireless Range | 300' + line of sight |
| Mic Inputs | Lo-Z, balanced, XLR & 1/4" 12V DC condenser mic (phantom) power Hi-Z (10 KΩ), unbalanced, 1/4" phone |
| Line Inputs | Balanced Mono 1/4" & Unbalanced Stereo 3.5 mm |
| Line Output (post fader) | Isolated, 600Ω, 1/4" phone |
| Speaker Out | 4-pole Neutrik Speakon® jack |
| DC Power | 19 VDC, 60 watts max |
| Battery | One 12V LFP rechargeable battery, 7.5 AH |
| Dimensions (HWD) | 18" x 11.5" x 9" (45.7 x 29.2 x 22.86 cm) |
| Weight | 15 lbs / 6.7 Kg |
| Warranty | 6 years |
| GG-AIR Technical Specifications | |
| AIR Frequency Range | 902 - 928 MHz |
| AIR Wireless Range | 300' + line of sight |
| Speaker In | 4-pole Neutrik Speakon® input |



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA